


**DRIVERS MULTICORRENTE PER LED A CORRENTE COSTANTE  
NON DIMMERABILE 30W VERSIONE MULTICURRENT**


**Codice TE30-300500M**

Alimentatore Multicorrente 300÷500mA Max. 30W non dimmerabile.  
Tensione d' Ingresso : 200÷240Vac 50/60Hz  
Temperatura di Lavoro : -20°C~60°C  
Power Factor : >0,9 - FLICKER FREE.  
Normative emissione elettromagnetica :  
EN55015,GB17743,EN61000-3-2 Class C(≥50% load),EN61000-3-3  
Safety standard : EN61347-1/2-13,GB19510.1/14,EN62384  
Normative Interferenza elettromagnetica :  
EN61000-4-2,3,4,5,6,8,1,EN61547  
Life : 50000h  
Protetto contro : cortocircuito, sovratensione, sovraccarico e sovratemperatura.  
Classe di isolamento II, IP20 in materiale metallico.

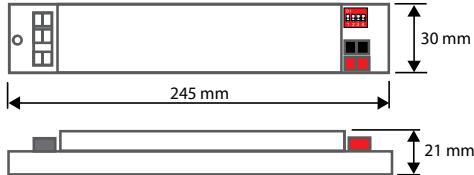

UM 06.02.2023

**SCHEMA DI COLLEGAMENTO**

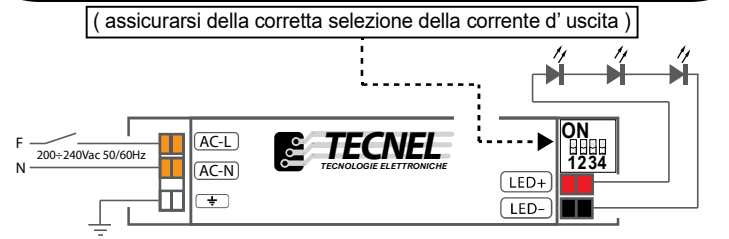

**VALORI DI CORRENTE E CONFIGURAZIONE DIP SWITCH**

Iout	Pout	Vout	1	2	3	4
300mA	12,6W	3-42V	-	-	-	-
350mA	14,7W	3-42V	ON	-	-	-
400mA	16,8W	3-42V	ON	ON	-	-
450mA	18,9W	3-42V	ON	ON	ON	-
500mA	21,0W	3-42V	ON	ON	ON	ON

UM 06.02.2023

